

M-20iA/35M



Max. load capacity
at wrist: 35 kg



Max. reach:
1811 mm


FANUC

Robot			Max. load capacity at wrist (kg)	Reach (mm)	Controlled axes	Repeatability (mm)	Mechanical weight (kg)	Motion range (°)						Maximum speed (°/s)						J4 Moment/Inertia	J5 Moment/Inertia	J6 Moment/Inertia	Average Power consumption (kW)	Protection	
Series	Version	Type						J1	J2	J3	J4	J5	J6	J1	J2	J3	J4	J5	J6					Body standard/optional	Wrist & J3 arm standard/optional
M-20	iA	35M	35	1813	6	±0.03**	252	340 [370]	260	458	400	280	900	180	180	200	350	350	400	110/4	110/4	60/1.5	1	IP54/ IP55	IP67

● standard ○ on request - not available ** Based on ISO9283

M-20iA/35M High Inertia

Operating space of J5-axis rotation center

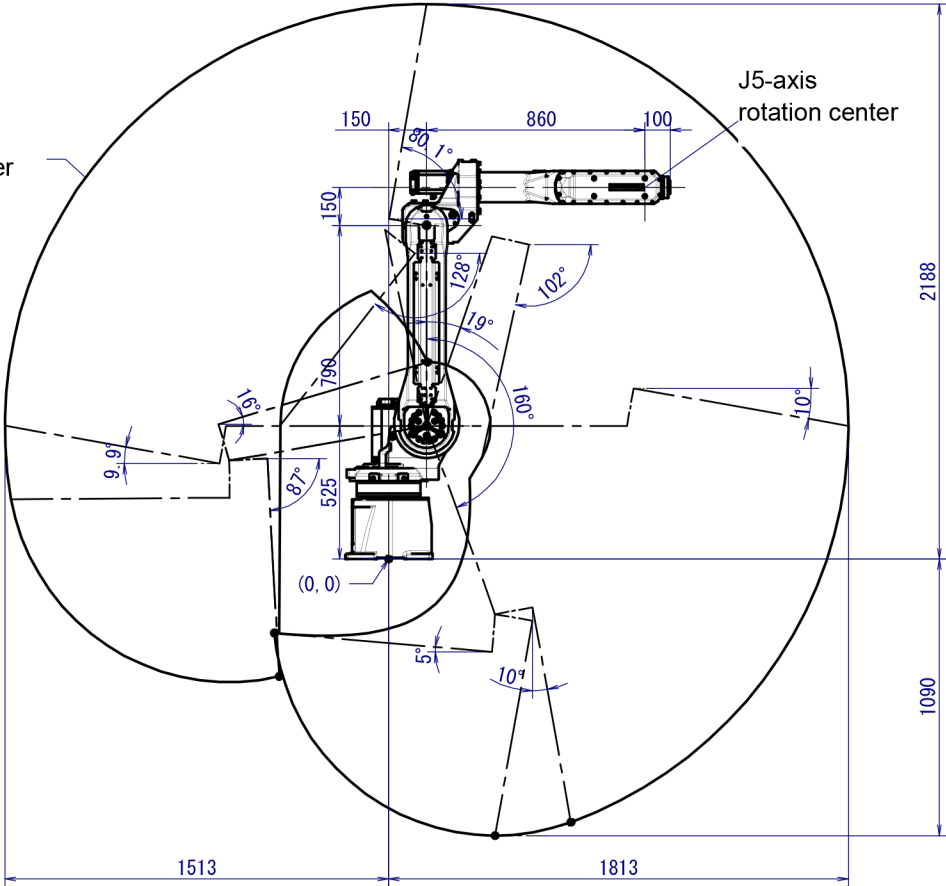

M-20iA/35M

**MOTION CONTROLS
ROBOTICS**
1500 Walter Ave, Fremont, OH 43420

Contact Sales
419.334.5886
sales@mcri-us.com
Click for a quote
motioncontrolsrobotics.com