

M-710iC/20M



Max. load capacity at wrist: 20 kg



Max. reach: 2582 mm

FANUC

Robot			Max. load capacity at wrist (kg)	Reach (mm)	Controlled axes	Repeatability (mm)	Mechanical weight (kg)	Motion range (°)						Maximum speed (°/s)						J4 Moment/Inertia	J5 Moment/Inertia	J6 Moment/Inertia	Average Power consumption (kW)	Protection	
Series	Version	Type						J1	J2	J3	J4	J5	J6	J1	J2	J3	J4	J5	J6					Body standard/optional	Wrist & J3 arm standard/optional
M-710	iC	20M	20	2582	6	±0.06**	530	360	225	435	400	280	900	175	175	180	350	360	600	39.2/ .88	39.2/ .88	19.6/ .25	2.5	IP54/ IP67	IP67


● standard ○ on request - not available ** Based on ISO9283

M-710iC/20M

High inertia



M-710iC/20M

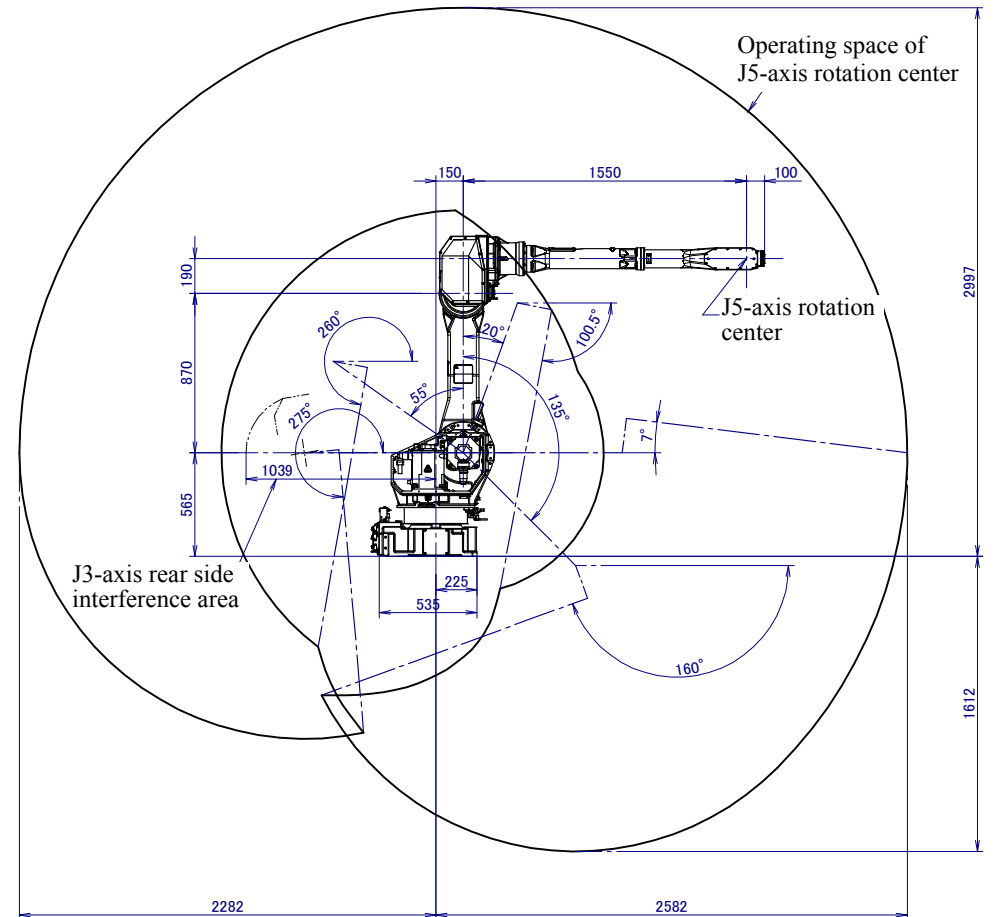

MOTION CONTROLS ROBOTICS
1500 Walter Ave, Fremont, OH 43420

CONTACT SALES
 419.334.5886
 sales@mcri-us.com
 Click for a quote
 motioncontrolsrobotics.com

FANUC
AUTHORIZED SYSTEM INTEGRATOR
 CERTIFIED SERVICE PROVIDER